


Ordering Information and Table of Dimensions



Basic Part NO.	End Connections	Dimensions(mm)					Orifice (mm)	Weight (kg)
	Both ends	L	L1	H	H1	L2		
NBVD-6M	6mm D-LOK	79.5	31.0	17.4	14.2	60	5.0	0.14
NBVD-4T	1/4" D-LOK	79.5						0.14
NBVF-4N	1/4" FEMALE NPT	40						0.07
NBVD-10M	10mm D-LOK	90	40.0	22.2	17.4	80	7.5	0.23
NBVD-6T	3/8" D-LOK	90						0.23
NBVD-6N	3/8" FEMALE NPT	45						0.14
NBVD-12N	12mm D-LOK	99	42.0	26.9	22.2	80	9.0	0.36
NBVD-8T	1/2" FEMALE NPT	99						0.36
NBVF-8N	1/2" FEMALE NPT	54.5						0.22
NBVD-16M	16mm D-LOK	109	51.0	31.7	28.5	100	12.5	0.51
NBVD-10T	5/8" D-LOK	109						0.51
NBVF-12N	3/4" FEMALE NPT	61						0.34
NBVD-12T	3/4" FEMALE NPT	110	55.0	38.0	38.0	100	16.0	0.57
NBVD-16T	1" D-LOK	134						0.87
NBVF-16N	1" FEMALE NPT	75						0.62

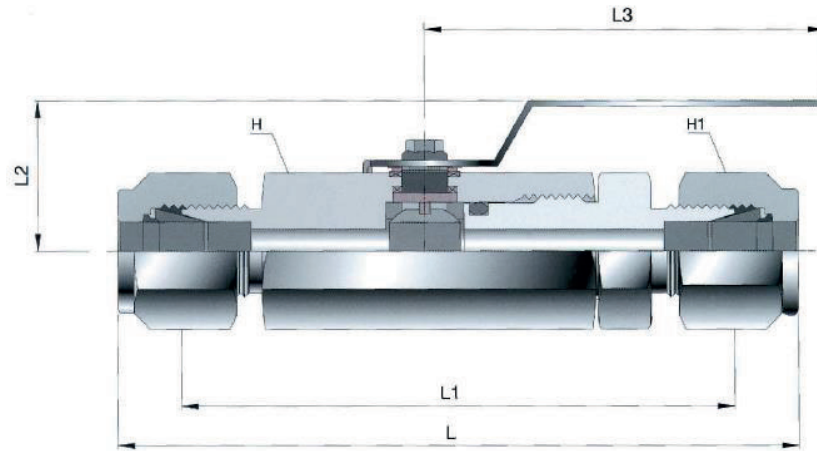